


AKKORTELLİ AYDINLATMA ARMATÜRLERİ

INCANDESCENT LIGHTING FIXTURES



EVJ/90°

WALL MOUNTED / DUVAR TİPİ

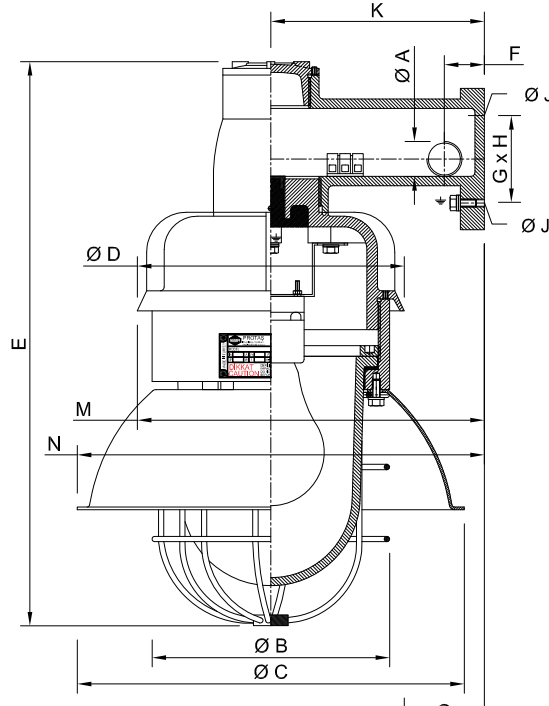

Model			Ağırlık (kg) Weight	Max. kablo çapı Max. cable diameter	Duy Tipi Caps	Ölçüler / Dimensions (mm)													
Reflektörsüz without Reflector	Reflektörlü with Reflector	Güç Wattage				Ø A		Ø B	Ø C	Ø D	E	F	G	H	Ø J	K	M	N	O
						NPT	METRIC												
EVJ.100/90°	EVJR.100/90°	100 W	3.25	Ø 14	E27	2 x 1/2"	2 x M20x1.5	130	270	152	327	30	80	57	7	150	226	285	74
EVJ.200/90°	EVJR.200/90°	200 W	6.00	Ø 19	E27	2 x 3/4"	2 x M25x1.5	178	290	198	423	30	125	65	9	160	260	305	60
EVJ.300/90°	-	300 W	7.25	Ø 19	E40	2 x 3/4"	2 x M25x1.5	265	-	283	549	30	125	65	9	160	302	-	16

Model	Lamba Tipi/Lamp Type	Güç Wattage (W)	Duy Caps	Işık Akısı (lümen) Luminaus flux	Renk Sıcaklığı (K) Color Temp.
EVJ.100/90°	Akkor Lamba / Incandescent Lamp	100	E27	1300	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	23	E27	1505	2700
	Led Lamba / LED Lamp	9	E27	806	2700
EVJ.200/90°	Akkor Lamba / Incandescent Lamp	200	E27	3000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	42	E27	3110	6500
	Led Lamba / LED Lamp	13.5	E27	1521	2700
EVJ.300/90°	Akkor Lamba / Incandescent Lamp	300	E40	4000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	60	E27	4310	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	75	E40	5550	6500

EVJ.100/90° ürün girişleri 3/4" veya M25x1.5 olarak üretilebilir / Cable connection inputs may be manufactured 3/4" or metric 25x1.5 for EVJ.100
Ampul dahil değildir / Bulb is excluded

Malzeme: Alüminyum ETIAL 140 Borosilikat camlı / Material: Aluminum ETIAL 140 with borosilicate glass