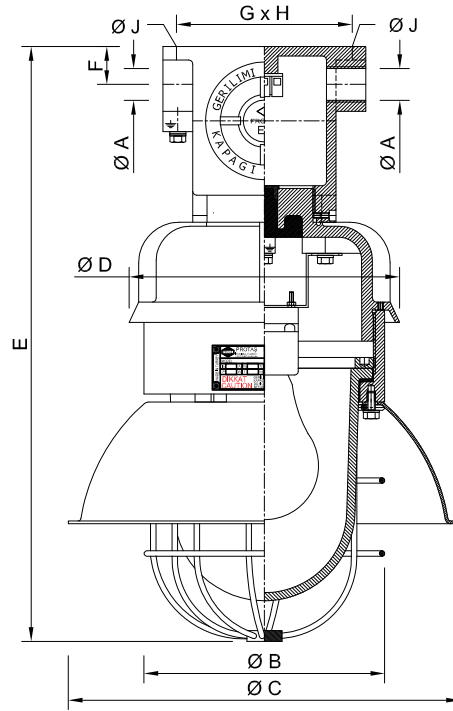



CEILING MOUNTED (WITH JUNCTION BOX) / BUATLI TAVAN TİPİ


Model			Ağırlık (kg) Weight	Max. kablo çapı Max. cable diameter	Duy Tipi Caps	Ölçüler / Dimensions (mm)									
Reflektörsüz without Reflector	Reflektörlü with Reflector	Güç Wattage				Ø A		Ø B	Ø C	Ø D	E	F	G	H	Ø J
						NPT	METRIC								
EVB.100	EVBR.100	100 W	3.25	Ø 14	E27	2 x 1/2"	2 x M20x1.5	130	270	152	337	20	54	94	7
EVB.200	EVBR.200	200 W	6.00	Ø 19	E27	2 x 3/4"	2 x M25x1.5	178	290	198	440	28	75	130	9
EVB.300	EVBR.300	300 W	8.25	Ø 19	E40	2 x 3/4"	2 x M25x1.5	265	420	283	568	28	75	130	9

Model	Lamba Tipi/Lamp Type	Güç Wattage (W)	Duy Caps	Işık Akısı (lümen) Luminous flux	Renk Sıcaklığı (K) Color Temp.
EVB.100	Akkor Lamba / Incandescent Lamp	100	E27	1300	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	23	E27	1505	2700
	Led Lamba / LED Lamp	9	E27	806	2700
EVB.200	Akkor Lamba / Incandescent Lamp	200	E27	3000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	42	E27	3110	6500
	Led Lamba / LED Lamp	13.5	E27	1521	2700
EVB.300	Akkor Lamba / Incandescent Lamp	300	E40	4000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	60	E27	4310	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	75	E40	5550	6500

EVB.100 ürün girişleri 3/4" veya M25x1.5 olarak üretilebilir / Cable connection inputs may be manufactured 3/4" or metric 25x1.5 for EVB.100
Ampul dahil değildir / Bulb is excluded

Malzeme: Alüminyum ETIAL 140 Borosilikat camlı / Material: Aluminum ETIAL 140 with borosilicate glass